



FBX DRAINAGE MEDIA

FBX Drainage Board is designed to provide positive drainage of foundation walls by directing ground water to the foundation drainage system.


FBX Drainage Board is a medium density basalt-mineral fibre board that performs as follows:

- CAN/CGSB 51.10-92 (Section 5.3.1) Mineral fibre board.
- ASTM C303 - Density (6 lb. Nominal) (96 kg/m³)
- Thickness (1" Nominal) (25 mm)
- Conforms to irregularities and can be installed horizontally or vertically.
- Resists impact - meets CCMC Drainage Products Rating CAN/ULC S702-97 (CSA A101-M83).
- Excellent drainage - passes side water inflow test requirements of CCMC. Technical guide. (Ortech 95).
- Easy to fabricate and handle.
- Non-corrosive.
- Fastening Technique:
(use two (2) cement nails)
(fasten at both upper corners to hold boards in place - no capping required once boards are secured in place.)

FBX DRAINAGE MEDIA

- Standard = 1" x 48" x 72"
(25 mm x 1220 mm x 1830 mm)
- Thermal Value = R4.4/inch
- Available Thicknesses:
(1", 2", & 3")
(subject to minimum quantities)
- Drainage Rating as tested:
Type 1 - up to 2.2 m below grade.
Type 2 - up to 3.7 m below grade.

150 mm +
crush stone

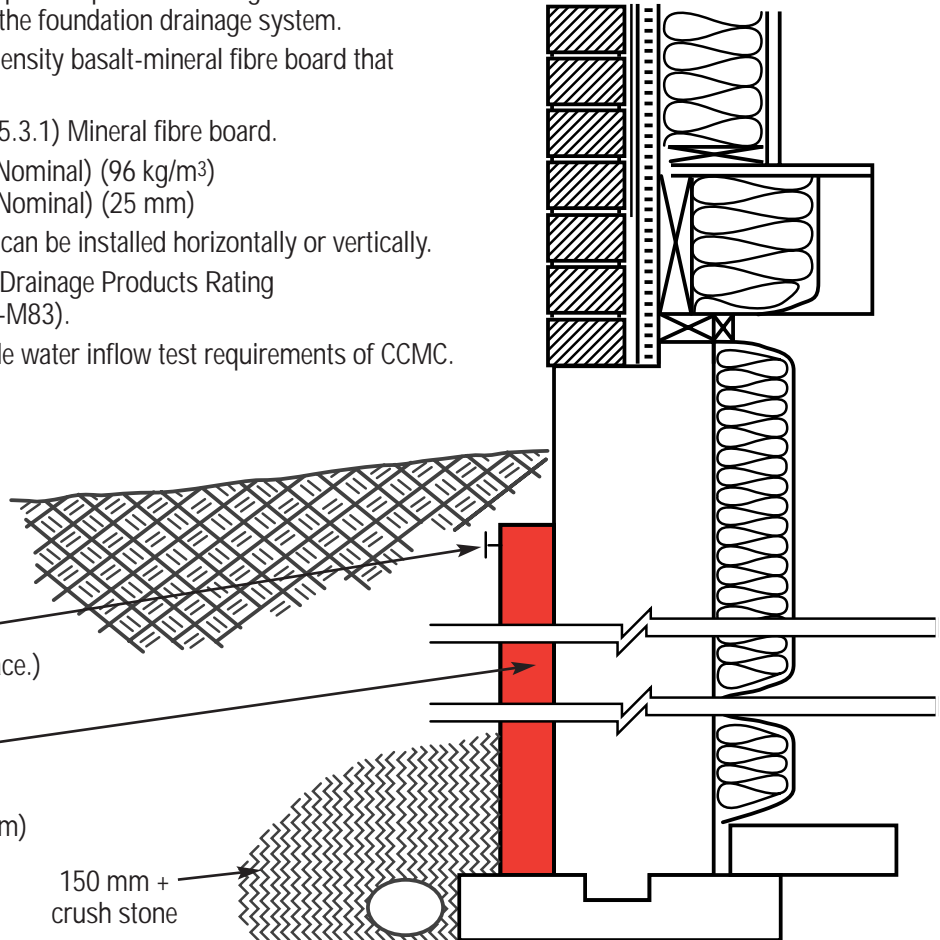

BELOW GRADE DRAINAGE MEDIA APPLICATION

(1" Board: use 1 1/2" (38 mm) concrete nails with 3/4" (19 mm) washers)

Ontario Building Code: FBX Drainage Board is designed and manufactured to meet the mineral fibre drainage layer requirements of the Ontario Building Code: ARTICLE 9.14.2.1 (2.1) (a).

* Meets the requirements for Class "B" products as per section 5.3 of the Canadian Construction Materials Centre (CCMC) technical guide for foundation drainage systems.

* If further information is required, please contact you Fibrex Technical Representative

FIBREX
Insulations Inc.®

561 SCOTT ROAD
SARNIA, ONTARIO CANADA N7T 7L4
<http://www.fibrex.on.ca>

CUSTOMER SERVICE: 1-800-265-7514
FAX: 1-800-363-4440